



BODY PU 944 PU SEALANT

Technical Data Sheet No 719

General Description

BODY PU 944 STP, is a high demands hybrid polyurethane, that covers the needs for adhesion and sealing in auto refinish sector. It is designed to be suitable for various applications like, adhesion, sealing, UV & weather resistance, overpaintable, fast curing, isocyanate & solvent free.

The technology of Silane Terminated Polyurethane Prepolymers, were we have curing with the water of atmospheric moisture, offers a final durable elastomer with good behaviour in high dynamic stresses, impact and shock proof, because there is absence of bubbles, resulting a final elastomer with outstanding performance.

STP PU technology, offers very good adhesion to various substrates like metals, plastic, wood, glass, ceramics, concrete etc. Also it can be applied over painted surfaces like primers, paints, clear coats etc. Tests with actual substrates and conditions have to be performed, in order to ensure adhesion and sealing good properties.

The product is user and eco friendly as it is free from isocyanate and solvents. It doesn't contain any silicones or PVC that may affect the final application, increasing UV, ageing & weathering resistance.

Surface

HB 944 PU STP, shows very good adhesion, in many different substrates like :

- Metal (carbon steel, aluminium, inox, galvanised steel etc.)
- Plastic (Polyethylene, Polyester, Polycarbonic etc.)
- Wooden surfaces
- Glass
- Ceramics
- Concrete
- Painted surfaces

Pretreatment / Cleaning of substrate




Surface must be clean from dirt, dust, oils & grease. but there is no need for further treatment with any type of primer or activator. Uncured material can be formed with a brush using 740 ACRYL NORMAL THINNER / REDUCER, with no affection of the material. 740 ACRYL NORMAL THINNER / REDUCER can be used also for cleaning uncured materials from tooling. Cured PU can only be removed mechanically



Make sure you always use appropriate protection.

944 PU CURING RATE

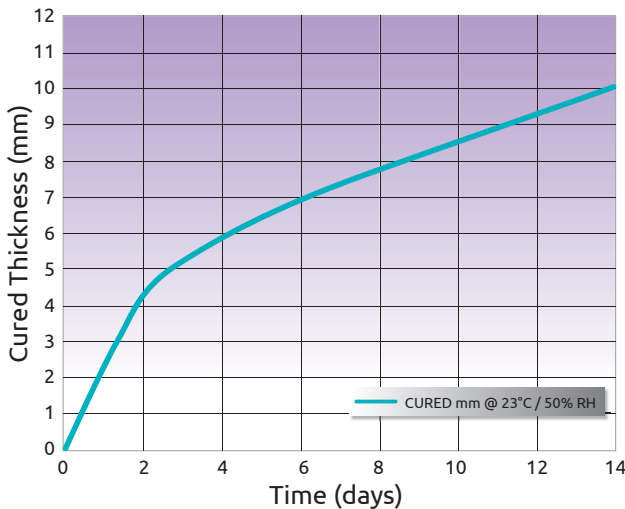

BODY PU 944 STP, cures with reaction of moisture that is present in the atmospheric air. In low temperatures, the water content of air is lower, especially in temperatures below 0°C (32°F), so the curing rate slows down.

The diagram shows the curing rate of BODY 944 PU STP, at 23°C (73°F) and 50% relative humidity.

First days the curing rate is quite high, thus giving a very low skin time (15-20 min).

For adhesion of big surface areas, it is better to apply small beads, rather than big amounts that will take time to be fully cured.

Technical Specifications:

Chemical Definition:
Silane Terminated Polyurethane Prepolymer

Colour:
Black - White

Curing Mechanism⁽¹⁾
Humidity curing, without CO₂ bubbles formation inside

Application Temperature:
5 – 40 °C (40 – 105 °F)

Skin Time⁽²⁾
15 min

Overpaintable wet on wet⁽²⁾
YES

Service Temperature:
-40 °C – 90 °C

Shore A hardness (ISO 868 / DIN 53505 / ASTM D 2240)
55

Specific Gravity:
1,50 ± 0,05 g/ml

VOC (2004/42/EC)
V.O.C. FREE

Theoretical Coverage:
-

Cleaning of equipment:
Clean after final use with 767 ECO-THINN NITRO THINNER / REDUCER

Remarks:
• It can also be used by countries that do not adopt the VOC legislation

Storage shelf life:
• Store in a cool place +5°C - +25°C +5°C - +25°C (+40 - +77°F and use within 12 months for best results. Guaranteed shelf life of 12 months in unused original containers.

⁽¹⁾ For curing speed refer to diagramm

⁽²⁾ @ 23°C (73°F) / 50% RH

For professional use only. The information displayed on this sheet has been carefully selected through a series of laboratory investigations. It is based on our best knowledge at the time of issue. The data is given for information purposes only. We are not liable for its correctness, accuracy and completeness. It is up to the user to check for newer updates or further information if needed for his intended purpose. The intellectual property of this product, trademarks and copyrights is protected. All rights reserved. The relevant Material Safety Data Sheet and warnings displayed on the label must be read carefully. We may modify and / or discontinue operation of all or portions of this information at any time in our sole discretion, without any notice and assume no responsibility to update the information. All rules set forth in this clause shall apply accordingly for any future changes and amendments.